

16-in-1 HDMI Input Analog Fixed-channel Modulator

Contents

1 Product introduction.....

32 Operating Instructions.....

5

2.1 The front panel.....5

2.2 Rear Panel.....5

Attachment Cannel List.....


1 Product introduction



AH1916H is a 16 modular frequency agile modulator.

It will be up to 16 HDMI signals into a road with 16 TV channels RF signals.

The product is widely used in hotels, hospitals, schools, electronic teaching, factories, security monitoring, VOD video on demand and other places of entertainment, especially for digital TV analog conversion, and centralized monitoring system.

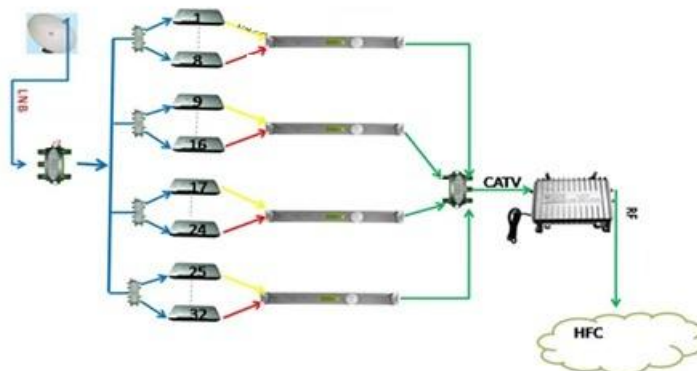

Product Features

- Stable and reliable
- 16 of each channel is completely independent, channel configuration flexibility
- Image high frequency and RF local oscillator MCU technique are used, frequency stability and high accuracy
- The function of each integrated circuit chips are used, the whole high reliability
- High-quality power supply, 7x24 hour stability

Specification

Frequency	47~862MHz
Output Level	$\geq 100\text{dB } \mu\text{V}$
Output Level Adj. Range	0~-20dB (Adjustable)
A/V Ratio	-10dB~-30dB (Adjustable)
Output Impedance	75 Ω
Spurious Output	$\geq 60\text{dB}$
Frequency Accuracy	$\leq \pm 10\text{KHz}$
Output Return Loss	$\geq 12\text{dB}$ (VHF) ; $\geq 10\text{dB}$ (UHF)
Video Input Level	1.0Vp-p (87.5% Modulation)

Input Impedance	75 Ω
Differential Gain	$\leq 5\%$ (87.5% Modulation)
Differential Phase	$\leq 5^\circ$ (87.5% Modulation)
Group Delay	≤ 45 ns
Visual Flatness	± 1 dB
Depth Adjust	0~90%
Video S/N	≥ 55 dB
Audio Input Level	1Vp-p (± 50 KHz)
Audio Input Impedance	600 Ω
Audio S/N	≥ 57 dB
Audio Pre- emphasis	50 μ s
Rack	19 Inch standard


2 Operating Instructions

2.1 The front panel



1. Channel Display---Of three figures show the corresponding channel information see attached 1 "BG Channel List"
2. Channel adjustment---Left and right buttons can be adjusted up and down channel
3. RF output level adjustment---Knob, adjustable RF output level
4. AV ratio adjustment---Knob adjusts the output of the A / V ratio
5. volume adjustment---Knob to adjust the output volume size
6. brightness adjustment---Knob to adjust the brightness of the output image

2.2 Rear Panel

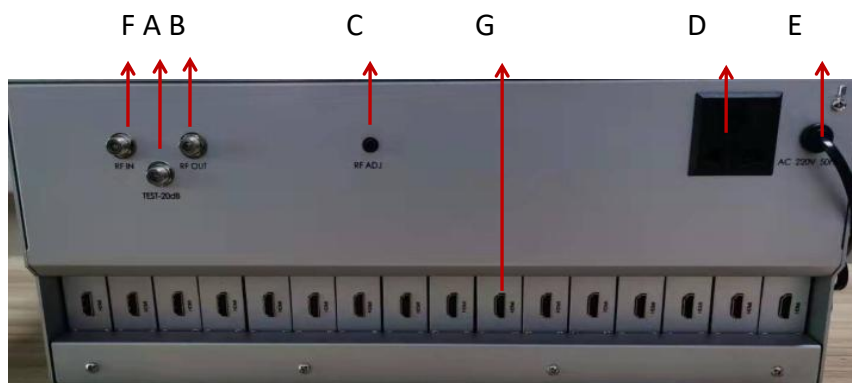

A. Output port
Video output port, -20dB;

B. RF output

Multiplexer module modulated, after mixing the RF output;

C. RF output regulation

Knob, adjustable RF output level;

test

test

D. Power cascade output

Superposition of multiple modulators, you can cascade output therefrom to other power modulator to reduce power outlet occupation; careful not to cascade more than 5 to avoid excessive current.

E. Power Input

Power Input: AC 220V 50Hz;

F. RF input

G. HDMI input

Each module video input.

Note: After installation of the modulator to be more than 10 minutes on the electric machine and then adjust the parameters!