




F12-01



F12-02

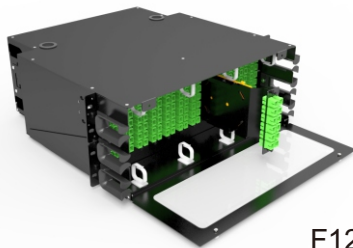

F12-03

CR RACK-MOUNT ENCLOSURES

- Standard 19" size.
- Material: 1.2mm cold-rolled metal with nice static painting.
- Splice tray can be superimposed, increasing the amount for optical fiber.
- Stackable and adjustable fiber rings simplify cable management.
- Patch cord bend radius guides minimize macro bending.
- Large capacity, suitable for datacenter and area cabling management.
- Transparent panel design, beautiful appearance.
- Enough space for fiber accessing and splicing.


CR RACK-MOUNT ENCLOSURES

Description	Maximum Capacity			Part NO.
	Adapter(SC/LC/FC/ST)	Adapter Plates	Splice Tray	
ODF-F12 4U Empty	144/288/144/144	12	12	ODF-F12


PACKING INFORMATION

Description	ODF-F12
Product Dimension	439*452.5*4U
Packing Dimension	560*490*240
Master Carton Dimension	560*490*240
Master Carton Capacity	1pcs
Net Weight	12.76kg

Rack Mount | ODF-F

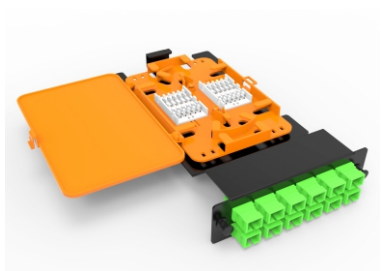

A

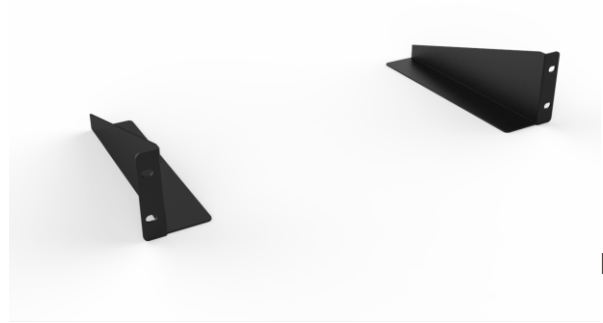

B

ACCESSORIES

Description
A Splice module up to 24-Fiber splice capacity.
B Bracket supporting for enclosure installation.

SPOTLIGHT



High density capacity designed for 144~288 fiber splicing in 4 HU enclosure. Easy installation for individual splice modules. Very well organized operation during high density splicing application.