


# SOFTEL



## OLTO-G8V-EDFA

Outdoor GPON OLT

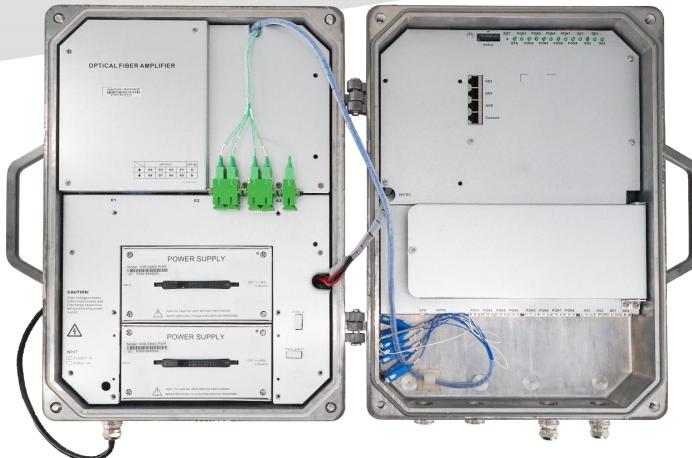

### Introduction:

SOFTEL Outdoor GPON OLT OLTO-G8V-EDFA It is composed of preamplifier EDFA module, OLT module and optical splitter, etc. It is an optical node device that organically combines CATV optical amplifier module and OLT module. Its modular design can be flexibly deployed in floor boxes, corridors, poles and other scenarios, simplifying network design and reducing engineering costs.

### Highlights

- Modular Design
- GPON OLT+EDFA+Splitter




Metal Case,Natural Heat Dissipation  
IP65 Dust&Water Proof



Dual Power Redundancy

### Application Scenarios

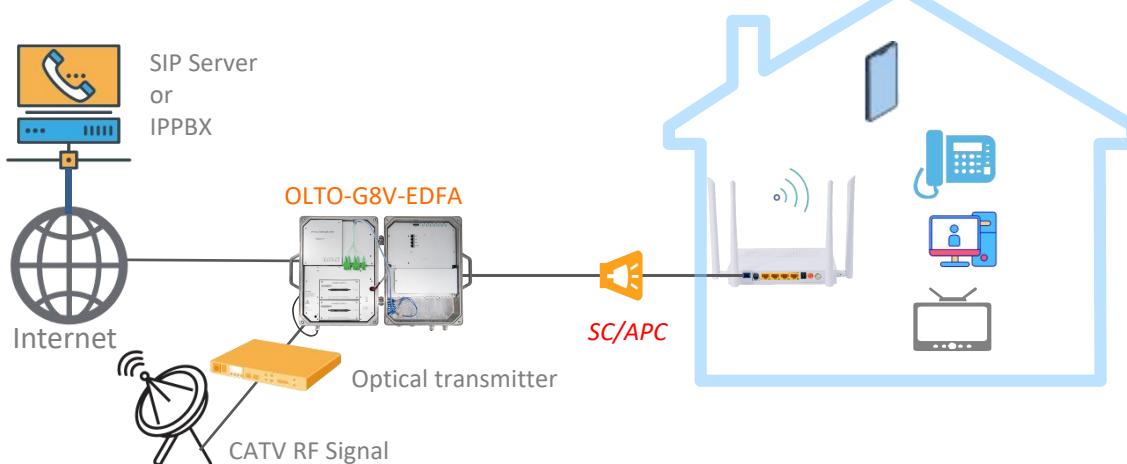

### Ordering Information:

Product Name	Product Description	Power Configuration	Accessories
OLTO-G8V-EDFA	8*GPON+1*RJ45+2*SFP +2*(SFP+)+8*22 EDFA	2*AC power	GPON SFP C++ module GPON SFP C+++ module 1G SFP module 10G SFP+ module

# Technical Specifications

Item			OLTO-G8V-EDFA		
Backplane Bandwidth (Gbps)			104		
Port Forwarding Rate(Mpps)			65.472		
<b>GPON Module</b>					
Chassis	Rack	1U 19Inch Standard Box			
GE/10GE Uplink Port	QTY	5			
	RJ45(GE)	1			
	SFP(GE)	2			
	SFP+(10GE)	2			
GPON Port	QTY	8			
	Physical Interface	SFP Slots			
	Connector Type	Class (Class C++/Class C+++)			
	Max splitting ratio	1:128			
Management Ports			1*10/100BASE-T out-band port, 1*CONSOLE port		
PON Port Specification (Class C+++module)	Transmission Distance	20KM			
	GPON port speed	Upstream 1.244Gbps, Downstream 2.488Gbps			
	Wavelength	TX 1490nm, RX 1310nm			
	Connector	SC/UPC			
	Fiber Type	9/125μm SMF			
	TX Power	+4.5~+10dBm			
	Rx Sensitivity	-30dBm			
Saturation Optical Power			-12dBm		
<b>EDFA Optical Amplifier Module</b>					
Working wavelength	1535nm - 1565nm				
Input optical power	-3dBm - +10dBm(ACC Mode) / -6dBm - +10dBm(APC Mode)				
Output optical power	13 dBm -22dBm				
Output optical power stability	≤±0.25dB				
Noise figure	≤5.0dB(@Input optical power is +3dBm)				
Input /output reflection loss	≥45dB				
Input/output pump light leakage	≤-30dBm				
C/CTB	≥63dB	EDFA input optical power is 3dBm, and the optical link composed of optical transmitter and receiver is tested.			
C/CSO	≥62dB				
C/N	≥50dB				
V1600G1WE0-PWR	AC:90~264V, 47/63Hz, 24V DC output, Dual Power Module Supply				
Management Mode	WEB/SNMP/Telnet/CLI/SSHv2				

## Management Function

- SNMP,Telnet,CLI,WEB,SSH v1/v2;
- Fan Group Control
- Port Status monitoring and configuration management
- Online ONT configuration and management
- User management
- Alarm management

## Layer2 Switch

- 16K Macaddress
- Support 4096 VLANs
- Support port VLAN and protocol VLAN
- Support VLAN tag/Un-tag, VLAN transparent transmission
- Support VLAN translation and QinQ
- Support storm control based on port
- Support port isolation
- Support port rate limitation
- Support 802.1D and 802.1W
- Support static LACP,Dynamic LACP
- QoS based on port, VID, TOS and MAC address
- Access control list
- IEEE802.x flow control
- Port stability statistic and monitoring

## Multicast

- IGMP snooping
- 1024 IP Multicast Groups

## DHCP

- DHCP server,DHCP relay,DHCP snooping
- DHCP option82

## Layer3 Route

- ARP proxy,2048 hardware Host Routes,2048 hardware Subnet Routes
- Support 802.1X,Radius,Tacacs+
- Support IP source guard; RIP/OSPF/BGP
- 1024 hardware Host Routes
- 512 hardware Subnet Routes

## IPv6

- Support NDP;
- Support IPv6 Ping,IPv6 Telnet,IPv6 routing;
- Support ACL based on source IPv6 address, destination IPv6 address, L4 port, protocol type, etc;
- Support MLD v1/v2 snooping(Multicast Listener Discovery snooping);

## GPON Function

- Tcont DBA
- Gemport traffic
- In compliant with ITU-T984.x standard
- Up to 20KM transmission Distance
- Support VLAN division and user separation to avoid broadcast storm

- Support power-off alarm function, easy for link problem detection
- Support broadcasting storm resistance function
- Support port isolation between different ports
- Support ACL and SNMP to configure data packet filter flexibly
- Specialized design for system breakdown prevention to maintain stable system
- Support RSTP,IGMP Proxy

## Dimension (L\*W\*H)

- 590mm\*470mm\*300mm

## Weight

- Net weight of single power: 18.2kg
- Gross weight of single power: 19.3kg

## Water Proof Level

- IP65

## Power Consumption

- 45W

## Working Temperature

- 40 ~ +70°C

## Storage Temperature

- 40 ~ +85°C

## Relative Humidity

- 5~90% (non-conditioning)